

GLUE DOWN

SWISS COLLECTION

TECHNICAL DATA SHEET




SUITABLE FOR WALLS

- ① High protection and resistance PU layer
- ② Layer of transparent PVC (0,3/0,55mm)
- ③ Printed Design
- ④ Vinyl



Characteristics	Test	Glue Down Swiss Collection
Classification	EN 16511	23/32 (0,3mm) - 23/33 (0,55mm)
Dimensions	EN 427	1235 x 230/305 mm (Wood) 620x450 mm (Stone)
Thickness	EN 430	1,6/ 1,8 mm
Weight	EN 430	3,40/ 4,13 kg/m ²
Fire Resistance	EN ISO 9239-1	Class BFLs1 (B1)
Dimensional Stability	EN 434	< 0,15 %
Residual Indentation	EN 433	max. 0,03 mm
Antistatic Performance	EN 1815	< 2kV
Acoustic Certification	EN ISO 717-2	ΔLw= 4/5dB
UV Resistance	ISO 105	6
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Chemical Resistance	EN 438	Grade 5
Fungus Test	ASTM G21:96	Grade 1
Water Resistance	EN 317	0% Swelling
Formaldehyde emission	EN 717	E1

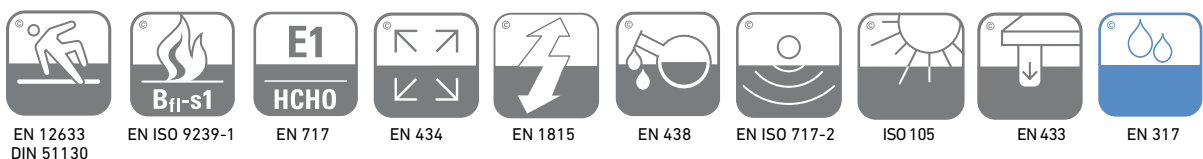

IMPORTANT INFORMATION:

The references SD55-2920, SD55-2921 and SD55-2922 are not available in Glue Down and HDF versions. The references SD30-1903, SD30-1904 and SD55-2905 have have a variation of tone in comparison with the SplashH2O Design version.