


RSVP

ORIGINAL COLLECTION

TECHNICAL DATA SHEET



**PVC LAYER
0,55 mm**

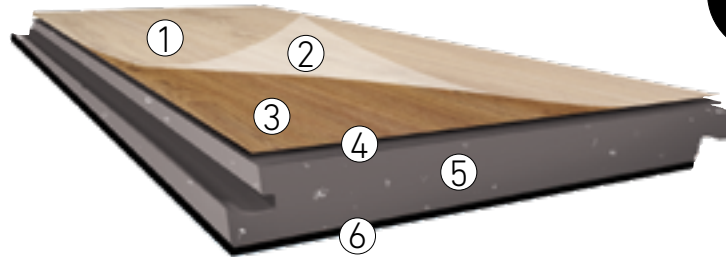

- ① High protection and resistance PU layer
- ② Layer of transparent PVC 0,55mm
- ③ Printed Decor
- ④ Vinyl layer
- ⑤ Rigid PVC 4,5mm
- ⑥ Foam 2mm



Installation up to 120m² without expansion joints. Maximum 12m length / 10m width.

Characteristics	Test	RSVP
Classification	EN 16511	23 / 33
Dimensions	EN 427	1220 x 220 mm
Thickness	EN 430	7 mm
Weight	EN 430	9,90 Kg/m ²
Abrasion Resistance	EN 660-2	≤0.015g/1000r
Residual Indentation	ISO 24343-1	≤0.10mm
Chemical Resistance	EN 438	Grade 5
Fire Resistance	EN 13501-1	Class BFLs1 (B1)
Dimensional Stability	ISO 23999	≤ 0,12 %
UV Resistance	ISO 105	≥ Grade 6
Antistatic Performance	EN 1815	< 2kv
Water Resistance	EN 317	0% Swelling
Slip/Slide resistance	EN12633	Class 2
	DIN 51130	R10
Formaldehyde emission	EN 717	E1
Curving	ISO 23999	≤ 1,20 mm
Peel Resistance	ISO 24345	≥50N/5cm
Anti-scratches	-	≥2500g
Acoustic Certification	EN ISO 717-2	ΔLw= 18 dB
Cigarette burn resistance	EN 438 - 2	Class 3
Locking Strength	ISO 24334	490 kg/ml
Thermal Resistance*	EN12664	0,08m ²
Impact Resistance	EN1534	7,4 Kgf/mm ³

*Suitable for radiant heating and cooling

