




Beveled on the long side

RIGID PVC


RIGID DIGITAL

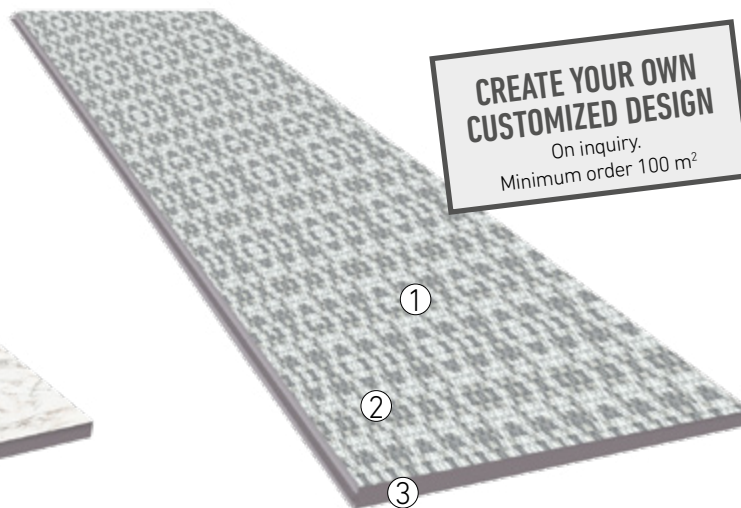

CREATE YOUR OWN CUSTOMIZED DESIGN
On inquiry.
Minimum order 100 m²

- ① High protection and resistance PU layer
- ② Decor 0,1 mm
- ③ Elastic vinyl foil 0,5 mm
- ④ Waterproof hydro core board 4,4 mm

- ① High protection and resistance PU layer
- ② Digital printing
- ③ Waterproof hydro core board 5 mm



INSTALLATION:
T&G system
on the long side

Characteristics	Test	Rigid PVC & Digital
Dimensions	EN 427/428	2600 x 935 mm
Thickness	EN 430	5 mm
Weight	EN 430	ca. 6000 g/m ²
Fire Resistance	EN ISO 9239-1	Class C-s3, d0 (B1)
Dimensional Stability	EN 434	< 0,10 %
Thermal Resistance	EN 12524	0,04 m ² K/W
Residual Indentation	EN 433	max. 0,03 mm
Reaction to static electricity	EN 1815	< 2kV
Lightfast	ISO 105	6/7
Resistance to chemicals	EN 438	Good resistance
Emissions Value		In conformity with AgBB
Water Resistant test	EN 317	0% Swelling



EN ISO 9239-1



EN 1815



EN 438



ISO 105



EN 12524



EN 317