


# TILES




## TECHNICAL DATA SHEET

**PRESCRIPTION:** Floover Woven Outdoor Tiles flooring, size \_\_\_\_\_, reference \_\_\_\_\_, classification 23/33 with high abrasion resistance, stains resistance class 0 according to norm EN423 and grade 8 of UV resistance. Floover Woven Tiles are very easy to install thanks to its grid system and it is easy to maintain using neutral cleaner and high water pressure or brusher machines.

Format 300 x 300 x 31 mm

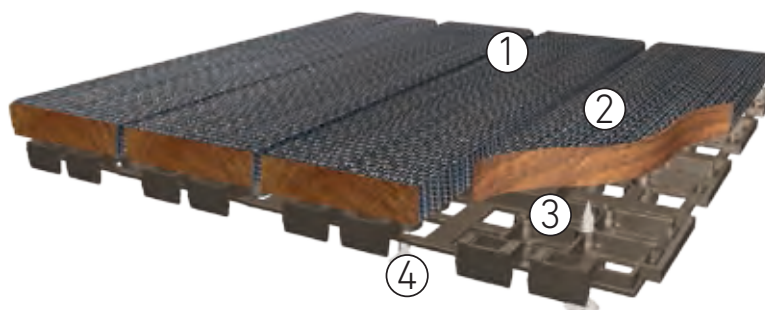

- ① Woven Vinyl
- ② Thermo treated pine 16 mm
- ③ Polypropylene grid
- ④ Zinc-coated screw

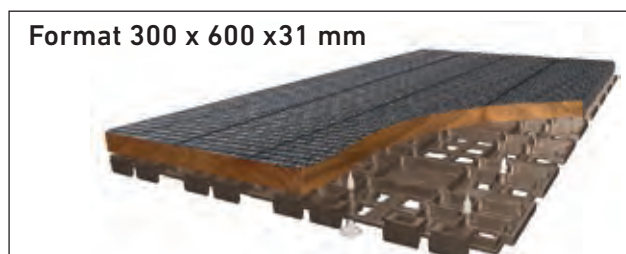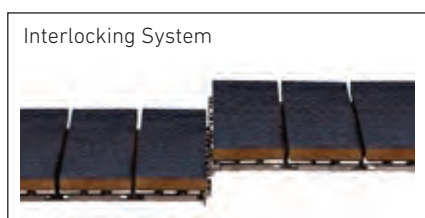

Characteristics	Test	Tiles
Individual strip size		292,5 x 70 x 16 mm (± 0,5 mm) / 588 x 70 x 16 mm (± 0,5 mm)
Gap between strips		4 mm (± 0,5 mm)
Classification (superficial layer)	EN 685	23/33
Density		480 kg/m <sup>3</sup>
Hardness		65 Shore D
Curve characteristics	Interior procedure	15.7 MPA (breaking strength: 200 dist.)
Heat conduction	ISO 8301-1991	0.07 W/m/K
Temperature resistance		No alterations between -25 and 70 °C
Resistance to water		Swelling after 24h 0,00%
Thermal dilatation coefficient	Interior procedure	0,81 mm / m / 10°C
Slip / Slide resistance	EN 12633	Class 2 (Class 3 with additional treatment)
	DIN 51130	R10
Abrasion resistance	EN 660-1/ EN 660-2	0,068 mm / 1,80 mm <sup>3</sup>
UV ray resistance	ISO 105 - B02	> Grade 6
Spots and chemical resistance	EN 438	Grade 5 (Group 1, 2 and 3)
Formaldehyde emission	EN 717	E1
Fungus resistance	ASTM G21	Grade 1



**NOTE:** Being a textile product, this range has a tolerance of 2% asymmetry, known as skew and bow effect. Maximum fraying tolerance of 5 inner-yarns/ml guaranteed. It has all the textile properties and these may suffer variations or changes with time that may affect and alter the colour.